




H^{1/4} 1200

Standing Flower Tower

Specification

(mm)

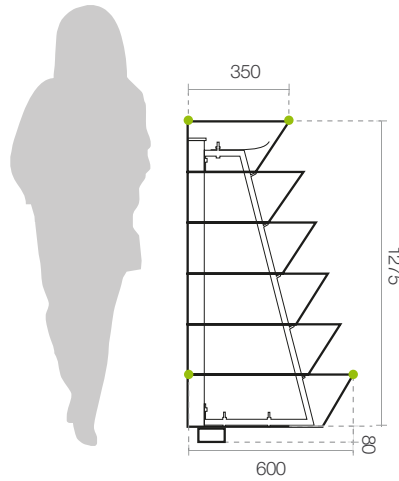

A upper view



! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

✓ P 379058

Registered design

✓ Wp 9324-25

Made in EU

36 month warranty

Number of rings	6	Weight before planting	38 kg
Capacity	157 l	Weight after planting	96 - 150 kg
Total height	1355 mm	Estimated amount of seedlings	29 - 35 pieces
Base diameter	600 mm	Warranty	36 months

Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Production method

- laser-cut rings
- MAG / TIG welded rings
- hot dip galvanized
- powder coated rings (DUPLEX system)

Safety

- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H^{1/4}1200


Standing Flower Tower

Transport (mm)

A side view

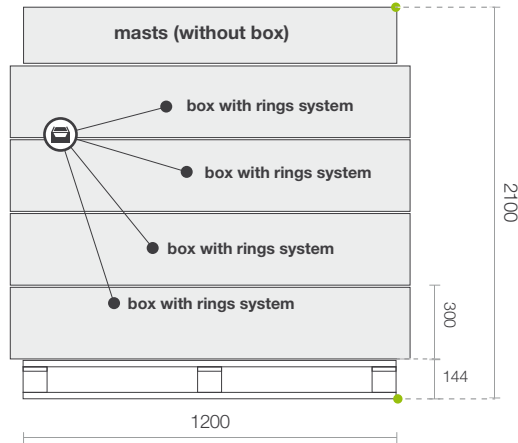

B side view

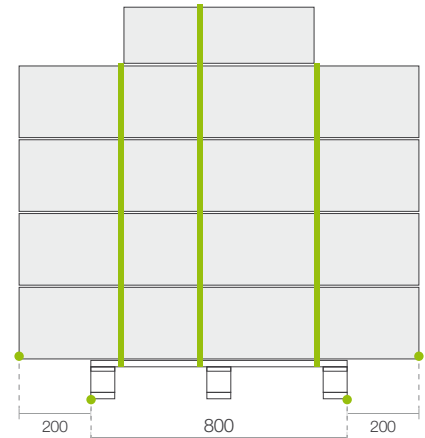

 4 SETS PACKED IN A BOX


UP TO  SETS FOR A EURO PALLET

Set content

Lower pan with legs	1 item	Mast (profile 30x30 mm)	1 item
Quarter-ring	5 items	Span	2 items
Conical screw 8x50	4 items	Security flat bar	2 items
Screw 6x20	4 items	Gasket	4,5 m
Screw 10x50	6 items	Glue for the gasket	1 item

Additional accessories

anti-theft system




A




side view

B



upper view

transport module



A




front view

B



side view

watering system **TerraClick Tif**



number of lines in the system: 3
 type of connector: GEKA
 flow of drippers: 2 – 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals
 and acidification

