


H_{1/2}2400

Standing Flower Tower

Specification

(mm)

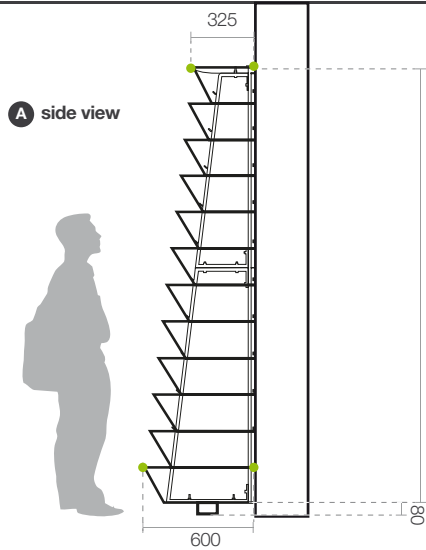

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

✓ P 379058


Registered design

✓ Wp 9324-25

 Made in EU

 36 month warranty

Number of rings	12
Capacity	667 l
Total height	2610 mm
Base diameter	1/2 1200 mm

Weight before planting	103 kg
Weight after planting	355 - 650 kg 
Estimated amount of seedlings	80 - 100 pieces
Warranty	36 months

 weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Production method

- laser-cut ring
- MAG / TIG welded rings
- hot dip galvanized
- powder coated rings (DUPLEX system)

Safety

- rubber gasket on each rings
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H_{1/2}2400


Standing Flower Tower

Transport
(mm)

A side view

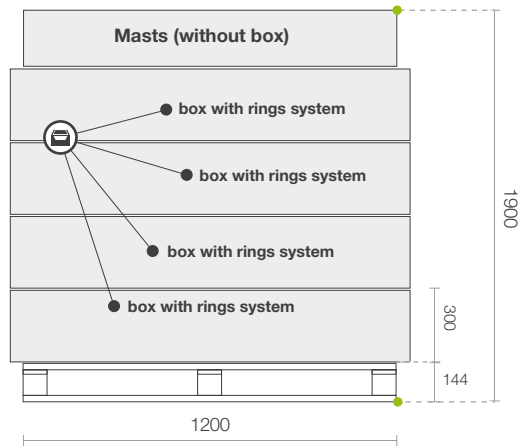

B front view

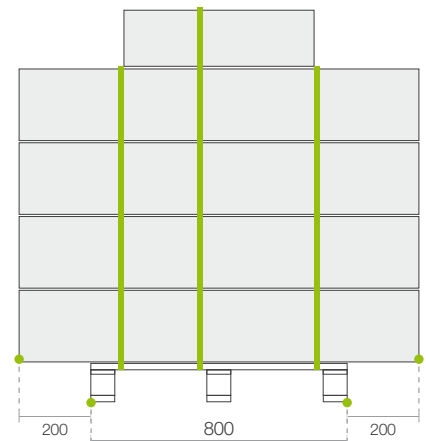

 2 SETS PACKED IN A BOX


UP TO **8** 8 SETS FOR A EURO PALLET

Set Contents

Lower pan with legs	1 item	Mast (profile 50x20 mm)	1 item
Half-rings	11 items	Mast (profile 60x30 mm)	1 item
Conical screw 8x50	4 items	Upper span	3 items
Screw 10x50	14 items	Lower span	3 items
Screw 10x90	4 items	Security flat bar	2 items
Screw 6x20	10 items	Gasket / glue	20m / 2 items

Additional accessories

 anti-theft system




A




side view

B



upper view

 transport module



A




front view

B



side view

 watering system **TerraClick Tif**

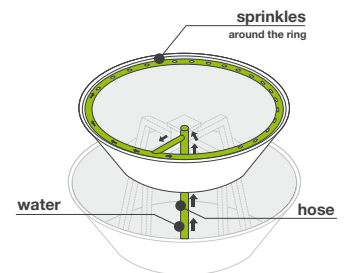

number of lines in the system: 6
 type of connector: GEKA
 flow of drippers: 2 - 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals
 and acidification

